

CHARGING AND FIRING THE CANNON



STEP 2

Hold the cannon down in a safe direction and screw the tank into the regulator in a clockwise motion as shown in the photo. Be careful not to crossthread.




STEP 3

Place your pre rolled t-shirt down into the barrel.

STEP 4

While pointing the cannon up in a safe direction push the pressure adjustment lever toward the regulator while looking at the pressure gauge. You should hear the cannon begin to fill. NOTE that fingers are off of the trigger.

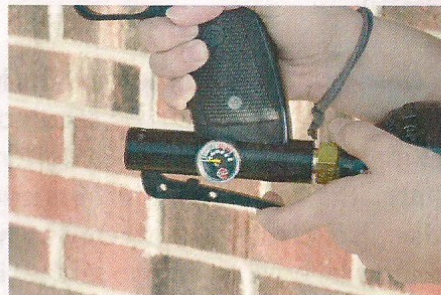

STEP 5

When you reach your desired pressure as shown on the pressure gauge. Release the pressure adjustment lever. If your desired pressure is 300psi (the max pressure of the cannon) the cannon will stop filling automatically at that pressure by design.



STEP 6

Point in a safe direction and pull the trigger to fire.


Repeat steps 3-6 for each desired shot



DEGASSING THE CANNON (after use)

STEP 1

After your last shot, point the cannon down in a safe direction and pull the trigger again to make sure that the chamber is completely discharged. The pressure gauge should read 0 psi.

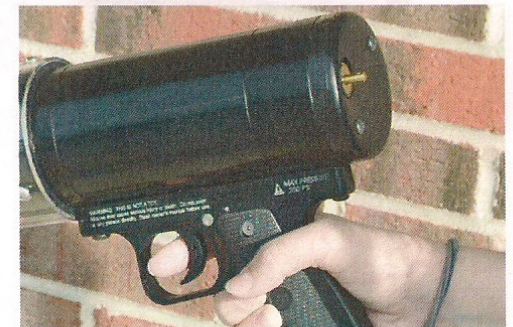

STEP 2

Unscrew the CO2 tank one half turn (counter - clockwise). You should hear a little puff of air as the remaining pressure is outgassed through the vent hole (SEE PHOTO) on the bottom of the regulator. Then continue to remove the tank by turning counter clockwise. Once removed store the tank in the case with the launcher until next use.

